



**51-SDMS-01**

**REV. 02**

**SPECIFICATIONS**

**FOR**

**DISTRIBUTION TRANSFORMERS UP TO 36KV**

**This specification is property of SEC and  
Subject to change or modification without any notice**



## Table of Contents

| <u>Clause</u> |   | <u>Page</u> |
|---------------|---|-------------|
| 1.0           | SCOPE                                       | 3           |
| 2.0           | CROSS REFERENCES                            | 3           |
| 3.0           | APPLICABLE STANDARDS                        | 3           |
| 4.0           | DESIGN AND CONSTRUCTION<br>REQUIREMENTS     | 3           |
| 4.1           | General                                     | 3           |
| 4.2           | Ratings                                     | 4           |
| 4.3           | Losses                                      | 4           |
| 4.4           | Emergency Loading                           | 5           |
| 4.5           | Cooling                                     | 5           |
| 4.6           | Transformer Oil                             | 5           |
| 4.7           | Tap Changer                                 | 5           |
| 4.8           | Vector Group                                | 5           |
| 4.9           | Impedance Voltage                           | 5           |
| 4.10          | Temperature Rise                            | 6           |
| 4.11          | Noise Level                                 | 6           |
| 4.12          | Short Circuit Level                         | 6           |
| 4.13          | Degree of Protection                        | 6           |
| 4.14          | Dimensions                                  | 6           |
| 4.15          | Tanks                                       | 7           |
| 4.16          | MV bushings                                 | 7           |
| 4.17          | LV bushings                                 | 8           |
| 4.18          | Supplementary Fittings                      | 9           |
| 4.19          | Name Plate                                  | 10          |
| 5.0           | TESTING                                     | 11          |
| 5.1           | Routine Tests                               | 11          |
| 5.2           | Type Tests                                  | 11          |
| 6.0           | INSPECTION                                  | 11          |
| 7.0           | PACKING AND SHIPPING                        | 12          |
| 8.0           | GUARANTEE                                   | 12          |
| 9.0           | SUBMITTALS                                  | 12          |
| 10.0          | LITERATURE                                  | 12          |
|               | DATA SCHEDULE                               | 13          |
|               | Fig (3) Surge Arrestor Mounting Bracket     | 17          |
|               | Fig (4) Rollers for Pad Mounted transformer | 18          |
|               | Fig (5) 200KVA and 300KVA Mounting Chanel   | 19          |
|               | Fig (6) 50KVA and 100KVA Support Clamps     | 20          |



## 1.0 SCOPE

This Saudi Electricity Company (SEC) Distribution Material Specification (SDMS) specifies the minimum technical requirements in respect of design, engineering, manufacturing, inspection, testing and performance of outdoor/indoor mineral oil immersed, three (3) phase distribution transformers intended to be used in 13.8kV and 33kV system of the Saudi Electric Company (SEC), Saudi Arabia.

It is not intended that this specification shall apply to dry type transformers. However, it can be considered as reference for transformers used in package/unit substations.

## 2.0 CROSS REFERENCES

This SDMS shall always be read in conjunction with the SEC specification 01-SDMS-01 titled "General Requirements for All Equipment/Material" latest revision, which shall be considered as an integral part of this SDMS. This SDMS shall also be read in conjunction with SEC Purchase Order (PO) requirements.

## 3.0 APPLICABLE CODES AND STANDARDS

The latest revisions of the following Codes and Standards listed shall be applicable for the equipment/material covered in this SDMS. In case of conflict, the vendor/manufacturer may propose equipment/material conforming to one group of Industry Codes and Standards quoted hereunder without jeopardizing the requirements of this SDMS.

- |     |             |   |
|-----|-------------|---|
| 3.1 | SSA 422     | Power Transformers (SASO – Saudi Arabian Standards Organization)      |
| 3.2 | SSA 421     | Testing Methods for Power Transformers                                |
| 3.3 | I E C 60076 | Power Transformers  |
| 3.4 | I E C 60296 | Specification for New Insulating Oils for Transformers and Switchgear |
| 3.5 | I E C 60551 | Measurement of transformer and reactor sound level                    |
| 3.6 | I E C 60137 | Bushings for alternating voltages above 1kV                           |
| 3.7 | I E C 60354 | Loading guide for oil-immersed Transformers                           |

## 4.0 DESIGN AND CONSTRUCTION REQUIREMENTS

### 4.1 General:

Transformers shall be suitable for outdoor/indoor usage, three phase, having two separate mineral oil immersed copper windings in hermetically sealed mild steel tanks. It should be suitable for base mounting with MV & LV bushings inside cable boxes for pad mounted, or on overhead line structure (base or side mounting) with top MV bushings and side LV bushings in cable box.



#### 4.2 Ratings:

All ratings of transformers shall be designed for single output voltage of 400/231Volts.

The standard ratings shall be:

Pole mounted: 50, 100, 200, and 300 KVA

Pad mounted: 300, 500, 1000, and 1500 KVA

Transformer rated KVA shall be calculated on the following assumptions:

Constant flux regulation.

Continuous steady load.

Design temperature of 30°C.

50°C average winding temperature rise and 45°C top oil temperature rise limits above ambient.

Maximum winding hot spot temperature of 98°C.

#### 4.3 Losses:

##### 4.3.1 Capitalization Formula:

Transformer vendors/manufacturers shall be evaluated by using the following capitalization formula:

$$T = P + 11000 \times C + 4000 \times W$$

Where

- T = Total capitalized cost in Saudi Riyals
- P = Initial cost of transformer in Saudi Riyals
- C = Iron (Core) losses in kW (No-Load Losses)
- W = Copper (Winding) losses in kW at rated load (Load Losses)

##### 4.3.2 Maximum Losses:

The indicated figures below are the maximum acceptable values. Transformers with losses exceeding these values will be rejected.

| Transformer Rating | No-Load Losses (Watts) | Load Losses (Watts) |
|--------------------|------------------------|---------------------|
| Up to 100KVA       | 250                    | 1500                |
| 200KVA             | 380                    | 2200                |
| 300KVA             | 520                    | 3200                |
| 500KVA             | 750                    | 4700                |
| 1000KVA            | 1100                   | 9000                |
| 1500KVA            | 1700                   | 14000               |

##### 4.3.3 Guaranteed Values:

No-load and Load losses submitted in the tender shall be treated as guaranteed values. Any increase in these values at the time of testing shall not be accepted.



#### 4.4 Emergency Loading:

After thermal equilibrium has been reached at 75% of rated load, the transformer shall be capable of sustaining the overload conditions listed in the following table without the transformer winding hot spot temperature exceeding 140°C:

| Load<br>Percent of rating (%) | Minimum Duration in Minutes at<br>Ambient Temperature of |      |
|-------------------------------|--|------|
|                               | 30°C   | 40°C |
| 133                           | 240  | 155  |
| 150                           | 98   | 65   |

The supplier shall demonstrate by test and calculation that these requirements are met.

#### 4.5 Cooling:

Cooling shall be by natural circulation of oil internal to the transformer and external air i.e. ONAN.

#### 4.6 Transformer Oil:

Transformer shall be supplied initially filled of Class 1 uninhibited transformer Mineral oil complying with IEC 60296.

#### 4.7 Tap Changer:

##### 4.7.1 M.V.

Transformer shall be fitted with a lockable 5 positions, manual, off-load Tap Changer having the following taps:

|           |         |                  |
|-----------|---------|------------------|
| Tap No. 1 | + 5%    | of rated voltage |
| Tap No. 2 | + 2 ½ % | of rated voltage |
| Tap No. 3 | 0 %     | of rated voltage |
| Tap No. 4 | - 2 ½ % | of rated voltage |
| Tap No. 5 | - 5 %   | of rated voltage |

#### 4.8 Vector Group:

Unless otherwise specified, the transformer shall be connected delta-star in accordance with vector group reference Dyn11.

#### 4.9 Impedance Voltage:

The impedance voltage at normal tap shall be 4% for transformers up to 300KVA, 5% for 500 KVA and 6% for transformers greater than 500KVA.

**4.10 Temperature Rise:**

At the rated power the transformer shall comply with the following Maximum temperature rises:

|                                 |            |
|---------------------------------|------------|
| Top oil                         | 45°C Max.  |
| Winding                         | 50°C Max.  |
| Hot Spot                        | 98°C Max.  |
| Avg. temp. due to short circuit | 250°C Max. |

**4.11 Noise Level:**

The noise level emitted by a transformer, at full load, shall not exceed 48 dB. Measurements shall be in accordance with IEC Standard 60551.

**4.12 Short Circuit Level:**

The short circuit current that transformer should withstand for two seconds is:

|  |
|--|
| 25 times full load current for ratings of 50, 100, 200, 300KVA |
| 20 times full load current for rating of 500KVA                |
| 17 times full load current for ratings of 1000 & 1500KVA       |

**4.13 Degree of Protection:**

Transformer and its cable boxes shall be designed to have adequate protection level suitable for outdoor usage.

**4.14 Dimensions:**

The maximum dimensions of the transformer shall be as follows:

For pole mounted transformers:

| Rating (KVA) | Width (mm) | Depth (mm) | Height (mm) |
|--------------|------------|------------|-------------|
| 50           | 1350       | 900        | 1450        |
| 100          | 1350       | 900        | 1450        |
| 200          | 1450       | 1100       | 1700        |
| 300          | 1450       | 1100       | 1700        |

For pad mounted transformers:

| Rating (KVA) | Width (mm) | Depth (mm) | Height (mm) |
|--------------|------------|------------|-------------|
| 300 & 500    | 1700       | 1400       | 1600        |
| 1000         | 1900       | 1600       | 1900        |
| 1500         | 1920       | 1700       | 2000        |



The above dimensions are not applicable for transformers used in Package/Unit substations.

#### 4.15 Tanks

##### 4.15.1 Tank fabrication:

- i. Transformer tanks shall be made of mild steel of 3mm thickness, and shall not leak. The criterion of leakage shall be discoloration by oil of white wash applied externally to the suspended part at an oil temperature 90°C or other method approved by SEC.
- ii. All pipes, radiators, fins, or corrugations that are welded to the tank shall be externally welded.
- iii. The tank shall be of hermetically sealed construction, and shall withstand an internal pressure of 30kN/m<sup>2</sup> without permanent deformation.
- iv. Top cover shall be bolted type and fitted with neoprene cork seals suitable for temperatures as specified in this specification. The cover shall be in such a design and construction as to prevent the ingress of moisture and accumulation of rainwater.

##### 4.15.2 Tank corrosion protection and finish:

- i. The transformer tank and its accessories shall be adequately protected against corrosion.
- ii. Hot dip galvanizing followed by painting is the preferred method of base protection. Otherwise tanks shall be shot-blasted and then immediately zinc sprayed to an average weight deposit of not less than 550g/m<sup>2</sup>, followed by zinc or zinc chromate based primary paint, and two coats of durable oil and weather resisting paint. Finish color shall be Cement Grey, RAL 7033. All bolts and fixings shall be suitably protected against corrosion.

Refer to SEC specification for paint (Color, Tests and Maintenance).

#### 4.16 MV bushings:

Bushings shall generally comply with the requirements of IEC Standard 60137. The MV bushings shall be labeled U, V, W by using indelible black color paint. Phase identification by adhesive stickers is not acceptable.

##### 4.16.1 Pole-mounted transformer:

The MV terminals shall be 3 porcelain bushings fitted on the top of the transformer tank. Bushings shall be of the outdoors-weatherproof type and provided with M12 screwed stems and nuts with washers.

##### 4.16.2 Pad-mounted transformer:

The MV terminals shall be 3 bushings fitted on the side of the transformer tank inside a termination box with cable entry coming vertically from bottom. The box shall include cable clamps, grounding connectors, and its size shall be adequate for terminating three single core or one three-core MV cables as per



SEC specification 12-SDMS-03, sizes 50mm<sup>2</sup> to 70mm<sup>2</sup> Aluminum or Copper with heat/cold/pre-mold termination. It shall be single gasketed removable bolted cover. Bottom plate shall be in two halves with cable entries steel knockouts suitable for above cables. Loose rubber bushings shall be provided inside of this box for these knockouts.

Bushings shall be provided with M12 screwed stems and nuts with washers. Dry type termination is used.

#### 4.17 LV bushings/terminals:

The low voltage leads of all transformers shall be brought out of the transformer tank on the opposite side of the HV bushings inside a cable box. The LV bushings shall be connected to conductors/cables by means of cable lugs, (SEC shall provide cable lugs). However, the manufacturer shall supply all bolts, nuts and washers. The LV bushings shall be labeled u, v, w, n by using indelible black color paint. Phase identification by adhesive stickers is not acceptable.

##### 4.17.1 Pole-mounted transformer:

The LV terminals shall be suitable to connect the following Aluminum cables:

| Transformer rating<br>KVA | Cables to be connected<br>Up to |
|---------------------------|---------------------------------|
| 50                        | one 4cx185mm <sup>2</sup>       |
| 100                       |                                 |
| 200                       | two 4cx185mm <sup>2</sup>       |
| 300                       |                                 |

See Spec. 12-SDMS-02 for details of cable lug.

##### 4.17.2 Pad-mounted transformer:

LV bushings/terminals shall be brought out of the transformer tank inside a cable box on the opposite side of the HV box with cable entry coming vertically from bottom; box shall have removable front and bottom sides.

The LV terminals shall be suitable to connect the following Copper cables:

| Transformer rating<br>KVA | Cables per phase to be<br>connected | Cables for neutral to<br>be connected |
|---------------------------|-------------------------------------|---------------------------------------|
| 300                       | one 1cx630mm <sup>2</sup>           | one 1cx630mm <sup>2</sup>             |
| 500KVA                    |                                     |                                       |
| 1000KVA                   | two 1cx630mm <sup>2</sup>           |                                       |
| 1500KVA                   | three 1cx630mm <sup>2</sup> /       | two 1cx630mm <sup>2</sup>             |

See Spec. 12-SDMS-02 for details of cable lug.



#### 4.18 Supplementary Fittings

##### 4.18.1 Bracket for Surge Arrestor:

For pole mounted transformer surge arrestor mounting bracket should be provided on top cover with distance between mounting points equal or greater than the distance between the center to center of MV bushings. Holes for surge arrestor mounting bracket shall be 14mm. See Fig (3)

##### 4.18.2 Temperature Indicator:

A removable dial type thermometer shall be fitted in a thermometer pocket on the transformer for oil temperature reading with a range 0-120°C. The indicator shall be visible from ground level.

##### 4.18.3 Pressure Relief Vent:

A vent shall be provided to prevent rupturing of the transformer. This shall be capable of withstanding the variations of pressure in normal service.

##### 4.18.4 Oil Level Indicator:

An oil level indicator shall be fitted with the sight glass or dial type fitted to the same side of the transformer as the tap change control handle. The indicator shall be visible from ground level.

##### 4.18.5 Lifting Lugs:

Lift lugs shall be permanently attached and arranged on the tank to provide a distributed balanced lift in a vertical direction for the completely assembled transformer and shall be designed to provide a safety factor of 3 (assuming that the transformer is filled with oil). The safety factor is the ratio of the ultimate stress of the material used to the working stress. The working stress is the maximum combined stress developed in the lifting provision by the static load of the completely assembled transformer including oil.

##### 4.18.6 Tank Earthing:

Two stainless steel M10 studs with nut and washer shall be provided diagonally opposite on the tank for pole mounted transformer, for pad mounted it shall be at the HV side of the transformer to facilitate tank earthing. If the base assembly is detachable then the earthing facilities shall be located on the tank wall. Suitable precautions shall also be taken to avoid corrosion attack on earthing facility.

##### 4.18.7 Oil Drain Facility:

Facility for oil draining and filling shall be provided. The drainpipe size shall be one inch with opening valve and sealing plug, the filling facility size shall be one inch with sealing plug.

4.18.8 Rollers:

For pad mounted transformer Bi-directional rollers having 12.5cm minimum diameter shall be fitted to facilitate site installation. Rollers should have a locking facility to secure the transformer in its position. See Fig (4).

4.18.9 Cable Clamps:

All HV and LV cable support clamps to the transformer body should be made of a non-ferrous material.

4.18.10 Mounting Channels:

For Pole-mounted transformers, mounting channels shall be designed with slots/holes suitable for transformer platform in Fig (5). For 50KVA and 100KVA support clamps shall be designed as per Fig (6).

4.19 **Name Plate:**

Each transformer shall be fitted with a rating plate of weatherproof material, fitted in a visible position, showing the information listed below. Etching, engraving or stamping shall legibly mark entries on the plate.

|  |             |
|--|-------------|
| Manufacturer's name                                | -           |
| Manufacturer's serial number                       | -           |
| Owners serial number (to be applied by SEC)        | -           |
| Year of manufacture                                | -           |
| Specification                                      | - IEC 60076 |
| Number of phases                                   | - 3         |
| Rated power  | - KVA       |
| Rated frequency                                    | - Hz        |
| Rated voltages                                     | - kV        |
| Rated currents                                     | - A         |
| Connections symbol (Vector Group)                  | - Dyn11     |
| Impedance voltage at rated current                 | - %         |
| Resistance   | - ohm       |
| Type of cooling                                    | - ONAN      |
| Total mass   | - kg        |
| Total mass of core and windings                    | - kg        |
| Volume of oil                                      | - Liter     |
| Connection diagram                                 | -           |
| Table giving tapping voltages of the tap positions | -           |
| Ambient temperature                                | - °C        |
| Purchase order no.                                 | -           |
| SEC stock number (Customer item code)              | -           |



## 5.0 TESTING

### 5.1 Routine Tests:

Routine tests shall be carried out on all transformers, and shall be free of charge. The manufacturer shall carry out the tests in accordance with IEC-60076 and a test certificate should be provided along with each transformer. The results of the tests shall be recorded on a routine test certificate, and two copies of this shall be sent to SEC immediately after the tests.

The following routine tests shall be carried out:

Measurement of winding resistance.  
 Voltage ratio measurement and check of polarity or vector group symbol at all tap positions. Bushing positions must have permanent markings at this stage of production.  
 Measurement of impedance voltage.  
 Measurement of load loss.  
 Measurement of no-load loss and no-load current.  
 Induced overvoltage withstand test.  
 Separate source voltage withstand tests on HV and LV windings.  
 Oil leakage test.

SEC may carry out routine tests in its laboratory on random basis on 20% of each batch delivered to SEC stores. If one transformer fails, SEC can decide to reject the batch, if pass SEC can decide to test any number of transformers of the same batch and the supplier shall replace any failed transformer.

### 5.2 Type Tests:

Type tests shall be carried out on individual transformers at an independent testing laboratory and be witnessed by representative acceptable to SEC.

The transformers offered shall meet any or all (as per SEC option) of the type test requirements of the standards listed below:

|                                     |                       |
|-------------------------------------|-----------------------|
| Test of temperature rise            | IEC 60076 and SSA 421 |
| Impulse voltage withstand tests     | IEC 60076 and SSA 421 |
| Noise level measurement             | IEC 60551             |
| Radio influence voltage measurement | IEC 60437             |
| Winding insulation requirement      | ASTM-D-202            |
| Tests on bushings                   | IEC 60507             |

## 6.0 INSPECTION:

SEC may wish to witness tests or to visit factory during manufacture of any or all items covered in this specification. Accordingly the supplier shall give advance notice to SEC of the manufacturing and test schedule.



## 7.0 PACKING AND SHIPPING

Packing and shipping shall generally be as per SEC General Requirements 01-SDMS-01 including the following:

- i. The transformer shall be delivered ready for service.
- ii. Supplier shall contact Materials Department of SEC for additional packing, handling, and shipment instructions as applicable.
- iii. Packing crates shall be marked with the following:
  - Manufacturer's name
  - Country of origin
  - SEC purchase order number
  - SEC item number
  - Gross weight in kilograms
  - Handling instructions
  - Final destination store

## 8.0 GUARANTEE

The supplier shall guarantee the transformers against all defects arising out of faulty design or workmanship, or defective material for a period of one year from the date of commissioning or two years from date of delivery. SEC certificates for date of commissioning or delivery shall be accepted.

## 9.0 SUBMITTALS

Submittals required with tender:

The supplier shall complete and return one copy of Data Schedule given by SEC.

The following drawings shall be provided with quotation for each transformer rating offered:

Outline of transformer showing position of fittings and attachments.

Details of HV and LV terminals.

Mounting arrangements.

Lifting arrangements.

Details of filling and draining valves.

Details of cable clamps.

Type test certificates for transformers of identical design.

## 10.0 LITERATURE

Maintenance and Operation Booklets shall be provided in English and Arabic languages.



## SEC DISTRIBUTION MATERIALS SPECIFICATION

51-SDMS-01, Rev.02

Dated: 1-08-2010G

TENDER NO. \_\_\_\_\_

## DATA SCHEDULE

Sheet 1 of 4

| NO | DESCRIPTION  | UNIT   | SEC REQUIREMENTS   | BIDDERS DATA |
|----|--|--|--|--------------|
| 1. | <b>GENERAL DATA:</b><br>1. Manufacturer<br>2. Applicable Standard<br>3. Type of Designation<br>4. Number of phases<br>5. Number of Windings<br>6. Frequency<br><br>7. Primary voltage<br><br>8. Secondary voltage  | No.<br>No.<br>Hz<br>KV<br>KV<br>KV<br>V  | IEC – 60076<br>Pole/Pad mounted<br>3<br>2<br>60<br>33 (or 34.5)<br>13.8<br>13.8-11 (dual)<br>400/231 |              |
|    | <b>INSULATION LEVEL:</b><br>9. Impulse withstand voltages (BIL):<br>a) MV winding<br>b) LV winding<br>10. Separate- source power frequency test voltage:<br>a) MV winding<br>b) LV winding<br>11. Induced overvoltage withstand test:<br>a) MV winding<br>b) LV winding<br>c) Test frequency   | kVp<br>kVp<br>kVrms<br>kVrms<br>kVrms<br>kVrms<br>Hz                                       | 200, 170, 110, 95<br><br>70, 38<br>10, 3   |              |
|    | <b>CONSTRUCTIONAL FEATURES:</b><br>12. Flux density at rated voltage and frequency<br>13. Specific loss in core laminations<br>14. Insulation of core laminations<br>15. Winding conductor material (Cu. or Al.):<br>a) MV winding<br>b) LV winding<br>16. Winding conductor shape<br>a) MV winding<br>b) LV winding<br>17. Winding resistance at 20°C per phase at principal tap:<br>a) MV winding<br>b) LV winding<br>18. Maximum current densities in windings at normal rating and principal tap:<br>a) MV<br>b) LV<br>19. Material of winding insulation:<br>20. Grade and type of core | T<br>Wt/Kg<br><br><br><br><br><br>Ohm<br>Ohm<br><br>A/mm <sup>2</sup><br>A/mm <sup>2</sup> |  |              |
| 2. | <b>RATINGS:</b><br>1. Nominal transformer rating at principal tapping<br>2. Normal rated current:   a) MV<br>b) LV<br>3. Design continuous ambient temperature   | KVA<br>A<br>A<br>°C  |  |              |





## SEC DISTRIBUTION MATERIALS SPECIFICATION

51-SDMS-01, Rev.02

Dated: 1-08-2010G

TENDER NO. \_\_\_\_\_

## DATA SCHEDULE

Sheet 3 of 4

| NO  | DESCRIPTION   | UNIT              | SEC REQUIREMENTS | BIDDERS DATA |
|-----|---|-------------------|------------------|--------------|
| 11. | <b>NOISE LEVEL:</b>   | dB                | 48               |              |
| 12. | <b>SHORT CIRCUIT LEVEL FOR 2 SECONDS:</b>                               | KA                |                  |              |
| 13. | <b>DEGREE OF PROTECTION:</b>  |                   |                  |              |
| 14. | <b>DIMENSIONS and MASSES:</b>   |                   |                  |              |
|     | 1. Overall dimensions of complete transformer in service:               |                   |                  |              |
|     | a) Width  | mm                |                  |              |
|     | b) Depth  | mm                |                  |              |
|     | c) Height   | mm                |                  |              |
|     | 2. Masses:  |                   |                  |              |
|     | a) Mass of core and winding   | Kg                |                  |              |
|     | b) Mass of tank   | Kg                |                  |              |
|     | c) Mass of oil  | Kg                |                  |              |
|     | d) Total mass of transformer ready for service                          | Kg                |                  |              |
|     | e) Shipping mass  | Kg                |                  |              |
| 15. | <b>TANKS:</b>   |                   |                  |              |
|     | 1. Tank construction  |                   |                  |              |
|     | 2. Top oil temperature for internal pressure of 30kN/m <sup>2</sup>     | °C                |                  |              |
|     | 3. Steady load at 40°C ambient at oil temperature given in 2            | KVA               |                  |              |
|     | 4. Steady load at 40°C ambient by considering effect of solar radiation | KVA               |                  |              |
|     | 5. Maximum withstand pressure of the tank for 24 hours without leakage  | kN/m <sup>2</sup> |                  |              |
|     | 6. Tank steel thickness   | mm                |                  |              |
|     | 7. Radiator steel thickness   | mm                |                  |              |
| 16. | <b>MV BUSHING:</b>  |                   |                  |              |
|     | 1. Manufacturer   |                   |                  |              |
|     | 2. Material / color   |                   |                  |              |
|     | 3. Rated current  | A                 |                  |              |
|     | 4. Rated thermal current a) 1 sec                                       | KA                |                  |              |
|     | b) 3 sec  | KA                |                  |              |
|     | 5. Impulse withstand voltage  | KVp               |                  |              |
|     | 6. Impulse flashover voltage  | KVp               |                  |              |
|     | 7. Power frequency withstand voltage                                    |                   |                  |              |
|     | a) Dry  | KVrms             |                  |              |
|     | b) Wet  | KVrms             |                  |              |
|     | 8. Power frequency flashover voltage                                    |                   |                  |              |
|     | a) Dry  | KVrms             |                  |              |
|     | b) Wet  | KVrms             |                  |              |
|     | 9. Puncture voltage   | KV                |                  |              |
|     | 10. Maximum withstand salinity  | kg/m <sup>3</sup> |                  |              |
|     | 11. Maximum withstand voltage at 224 kg/m <sup>3</sup> salinity at 20°C | KV                |                  |              |
|     | 12. Total creepage distance   | mm <sup>2</sup>   |                  |              |



## SEC DISTRIBUTION MATERIALS SPECIFICATION

51-SDMS-01, Rev.02

Dated: 1-08-2010G

TENDER NO. \_\_\_\_\_

## DATA SCHEDULE

Sheet 4 of 4

| NO         | DESCRIPTION   | UNIT            | SEC REQUIREMENTS | BIDDERS DATA |
|------------|---|-----------------|------------------|--------------|
| <b>17.</b> | <b>LV BUSHING:</b>  |                 |                  |              |
|            | 1. Manufacturer   |                 |                  |              |
|            | 2. Material / color   |                 |                  |              |
|            | 3. Rated current  | A               |                  |              |
|            | 4. Rated thermal current a) 1 sec<br>b) 3 sec   | KA<br>KA        |                  |              |
|            | 5. Impulse withstand voltage  | KVp             |                  |              |
|            | 6. Power frequency withstand voltage<br>a) Dry<br>b) Wet  | KVrms<br>KVrms  |                  |              |
|            | 7. Total creepage distance  | mm <sup>2</sup> |                  |              |
| <b>18</b>  | <b>SUPPLEMENTARY FITTINGS:</b><br>1. Is transformer fitted with all accessories required in this specification<br>2. Type and make of accessories:<br>a) Temperature indicator<br>b) Pressure relief vent<br>c) Oil level indicator |                 | Yes              |              |
|            | <b>LIST OF DEVIATION:</b>   |                 |                  |              |

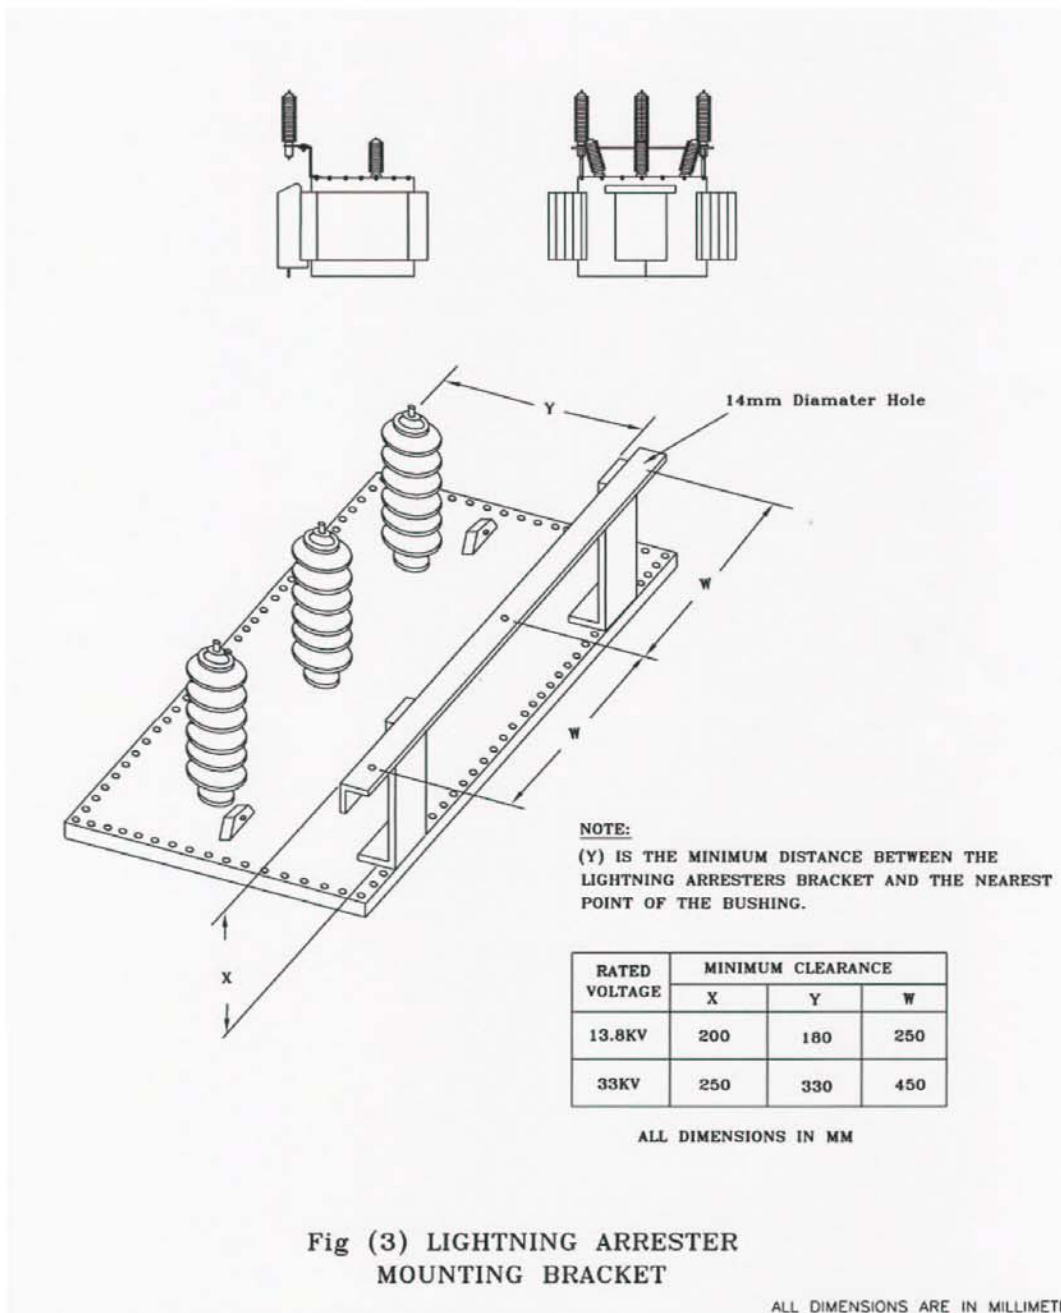


Fig (3) LIGHTNING ARRESTER MOUNTING BRACKET

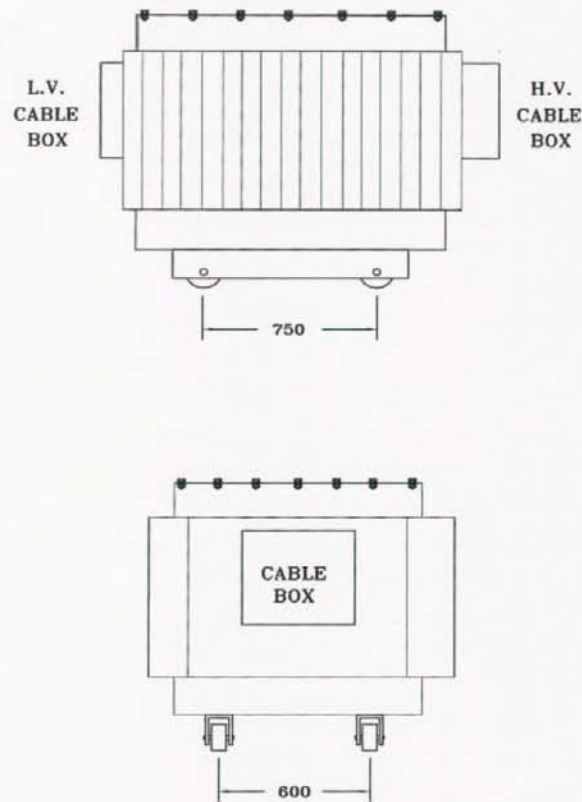


Fig. (4) - ROLLERS SPACING FOR  
PAD MOUNTED DIST. TRANSFORMER

ALL DIMENSIONS ARE IN MILLIMETER

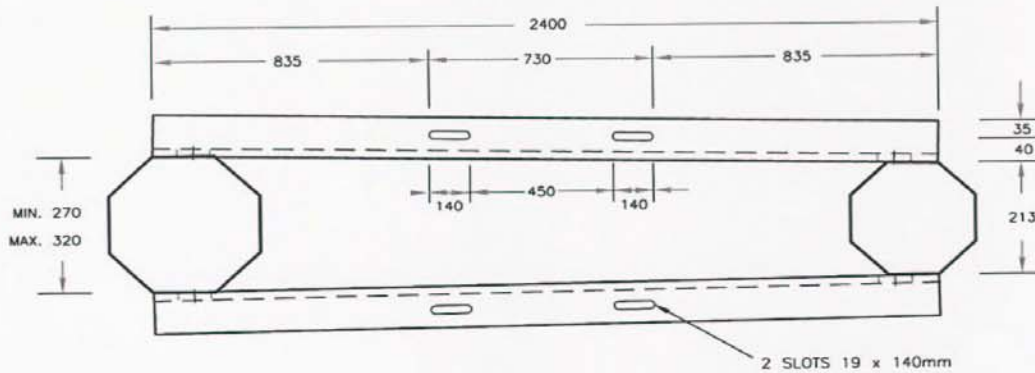


Fig. (5) MOUNTING BASE FOR 200kVA AND 300kVA POLE MOUNTED TRANSFORMER

ALL DIMENSIONS ARE IN MILLIMETER

